

IMPULSE SEALERS

Impulse and constant-heat bag sealers are safe, economical, fast and built to last. Perfect for sealing Polyethylene Polypropylene, PVC, Foil and Surlyn, Mylar or Bubble Pack/Padded Mailers. **1-year warranty.**

Automatic sealers options

- Seal & trim round wire standard
- Seal-only flat wire optional
- Heavy-duty construction
- UL approved
- Durable



4" Hand Operated Sealer*

8" Hand Operated Sealer*

12" Hand Operated Sealer*

16" Hand Operated Sealer*

*Optional Cutter Available



Hand Operated Impulse Sealer
Optional Cutter Available



8" Foot Operated Sealer

12" Foot Operated Sealer

16" Foot Operated Sealer

18" Foot Operated Sealer

24" Foot Operated Sealer

Pressure Time 1-8 seconds


Heat Seal Time 0.2 - 3.0 seconds

Cycle Frequency 1-8 seconds

12" Automatic Sealer

18" Automatic Sealer

24" Automatic Sealer

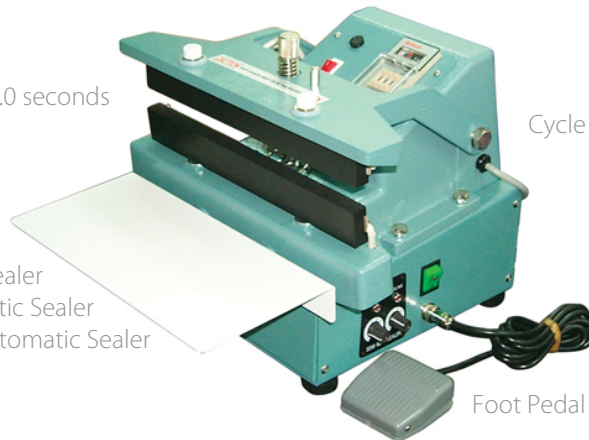

Foot Pedal or Automatic Action



The Flexible Packaging Experts

HAND HELD MODEL	MAX SEAL LENGTH	MAX. THICKNESS OF BAG	SEAL WIDTH	VOLTAGE	WATTS	WEIGHT
SMH100	4"	3 mil	2 mm	110*	200	4 lbs
SMH200	8"	6 mil	2 mm	110*	350	7 lbs
SMH300	12"	6 mil	2 mm	110*	500	10 lbs
SMH400	16"	6 mil	2 mm	110*	750	13 lbs
SMH200C	8"	6 mil	2 mm	110*	350	9 lbs
SMH300C	12"	6 mil	2 mm	110*	500	12 lbs
SMH400C	16"	6 mil	2 mm	110*	750	14 lbs

* 110 volt is standard but 220 volt is optional



FOOT MODEL	MAX SEAL LENGTH	MAX. THICKNESS OF BAG	SEAL WIDTH	VOLTAGE	WATTS	WEIGHT
SMFC202	8"	20 mil	15 mm	110*	250	51 lbs
SMF300	12"	6 mil	2 mm	110*	450	58 lbs
SMF305	12"	8 mil	5 mm	110*	900	58 lbs
SMF310	12"	8 mil	10 mm	110*	900	58 lbs
SMFU300	12"	6 mil	2 mm	110*	450	58 lbs
SMFU305	12"	8 mil	5 mm	110*	900	58 lbs
SMFU310	12"	8 mil	10 mm	110*	900	58 lbs
SMFC300	12"	20 mil	2 mm	110*	1500	58 lbs
SMFC302	12"	20 mil	15 mm	110*	350	58 lbs
SMFC310	12"	20 mil	15 mm	110*	350	58 lbs
SMFC402	16"	20 mil	15 mm	110*	420	58 lbs
SMF450	18"	6 mil	2 mm	110*	450	58 lbs
SMF455	18"	8 mil	5 mm	110*	1200	58 lbs
SMF410	18"	8 mil	10 mm	110*	1500	60 lbs
SMFU450	18"	6 mil	2 mm	110*	800	53 lbs
SMFU455	18"	8 mil	5 mm	110*	1500	58 lbs
SMFU410	18"	8 mil	10 mm	110*	1200	60 lbs
SMFP450	18"	6 mil	2 mm	110*	600	69 lbs
SMFP455	18"	8 mil	5 mm	110*	1200	69 lbs
SMFC450	18"	20 mil	2 mm	110*	1800	58 lbs
SMF600	24"	6 mil	2 mm	110*	800	59 lbs
SMF605	24"	8 mil	5 mm	110*	1500	63 lbs
SMF610	24"	8 mil	10 mm	110*	1500	65 lbs
SMFU600	24"	6 mil	2 mm	110*	800	59 lbs
SMFU605	24"	8 mil	5 mm	110*	1500	63 lbs
SMFU610	24"	6 mil	10 mm	110*	1500	65 lbs
SMFP600	24"	6 mil	2 mm	110*	800	74 lbs
SMFP605	24"	8 mil	5 mm	110*	1500	74 lbs
SMFC600	24"	20 mil	2 mm	110*	2200	61 lbs
SMFC602	24"	20 mil	15 mm	110*	420	64 lbs

* 110 volt is standard but 220 volt is optional



AUTOMATIC SEALER MODEL	MAX SEAL LENGTH	MAX. THICKNESS OF BAG	SEAL WIDTH	VOLTAGE	WATTS	WEIGHT
SMAC200	8"	20 mil	15 mm	110*	350	42 lbs
SMA300	12"	6 mil	2 mm	110*	450	43 lbs
SMA305	12"	8 mil	5 mm	110*	900	45 lbs
SMA310	12"	8 mil	10 mm	110*	900	46 lbs
SMAU300	12"	6 mil	2 mm	110*	450	43 lbs
SMAD305	12"	20 mil	5 mm	110*	2100	49 lbs
SMAD310	12"	20 mil	10 mm	110*	400	49 lbs
SMAC300	18"	20 mil	5 mm	110*	450	40 lbs
SMA450	18"	6 mil	2 mm	110*	1200	45 lbs
SMA410	18"	8 mil	10 mm	110*	1200	48 lbs
SMA455	18"	8 mil	5 mm	110*	1200	47 lbs
SMAU450	18"	6 mil	2 mm	110*	800	46 lbs
SMAD455	18"	20 mil	5 mm	110*	1800	54 lbs
SMAD410	18"	20 mil	10 mm	110*	1800	55 lbs
SMAC400	18"	20 mil	15 mm	110*	450	46 lbs
SMA600	24"	6 mil	2 mm	110*	800	53 lbs
SMA605	24"	8 mil	5 mm	110*	1500	53 lbs
SMA610	24"	8 mil	10 mm	110*	1500	55 lbs
SMAU600	24"	6 mil	2 mm	110*	800	48 lbs
SMAD605	24"	20 mil	5 mm	110*	2200	55 lbs
SMAD610	24"	20 mil	10 mm	110*	2200	57 lbs
SMAC600	24"	20 mil	15 mm	110*	420	55 lbs

* 110 volt is standard but 220 volt is optional

